

## 1.0 Introduction

The LW103HM is a 850MHz to 930MHz receiver module employing super-regenerative amplitude-shift-keying (ASK) modulation (or On-Off keying, OOK). Customer can specify the receiving frequency and the factory will preset the receiving frequency accordingly. LW103HM is designed to operate for low power device (LPD) applications.

## 2.0 Features

- Frequency range from 850 MHz to 930 MHz
- High sensitivity
- Small size (24mm x 19mm)
- Low power consumption
- Operate from -20 °C to 70 °C
- Low cost
- Low RF emission

## 3.0 Applications

- Remote controllers
- Security systems such as car alarm
- Wireless door bells
- Garage openers
- Radio controlled toys
- Monitoring systems
- RFID

Lexiwave Technology (Hong Kong) Ltd.

[www.lexiwave.com](http://www.lexiwave.com)

LW103HM 850 MHz to 930 MHz ASK Receiver Module


Preliminary Data Sheet

Subject to change without prior notice



Rev 0.1, June, 2008

## 4.0 Pin Description



Pin no.	Symbol	Description
1	ANT	Antenna input
2	GND	RF ground
3	VCC	Power supply
4	DATA	Data output

## 5.0 Electrical Characteristics

### 5.1 Maximum ratings

Rating	Symbol	Value	Unit
Power Supply Voltage	$V_{BATT}$	6	Vdc
RF Input Power	$P_{max}$	-25	dBm
Junction Temperature	$T_J$	125	°C
Storage Temperature Range	$T_{STg}$	-55 to 125	°C

### 5.2 Recommended Operating Conditions

Characteristics	Value	Unit
Supply voltage	2.5 – 3.3	V
RF frequency range	850 - 930	MHz
Max data rate	5	Kbps

### 5.3 DC Electrical Characteristics

Characteristics	Minimum	Typical	Maximum	Unit
Standby current	5	-	50	$\mu A$
Operating current	1.5	-	3	mA
Input Low Voltage	0.8*Vdd	-	Vdd	V
Input High Voltage	Vss	-	0.1*Vdd	V

### 5.4 AC Electrical Characteristics

Characteristics	Minimum	Typical	Maximum	Unit
Sensitivity (Direct RF IN) 1KHz modulation	-	-90	-	dBm
Stabilization time	-	-	20	ms

## 6.0 Functional Descriptions

LW103HM is a super-regenerative receiver module. It employs Lexiwave's receiver RFIC LW103H as the core component in the module. The heart of the chip is an oscillator operating in super-regenerative mode. The demodulated baseband signal is filtered by a low pass filter. The filtered signal is then amplified by an operational amplifier. The amplified signal is compared with reference voltage at a data comparator. The transmitted "0" and "1" will be exported at the DATA output.


A bandgap reference is implemented inside the chip for stable operation over temperature and supply voltages. In addition, our patent pending approach allows the module operates normally from 2.5V to 3.3V and remain stable at component variations. The chip is thus ideal for mass production applications of which no tight tolerance components are required.

LW103HM makes use of the internal Low Noise Amplifier (LNA) to achieve higher sensitivity and isolation to meet emission requirements. At the time when oscillation frequency of the super-regenerative oscillator is affected by a closing object, (hand effect), LNA will offer signal isolation and minimize receiver sensitivity degradation.


## 7.0 Evaluation Board

### LW103HM PCB Bottom Layer (23.3 x 18.5 x 1 mm)

Antenna, GND, VCC, DATA, EN

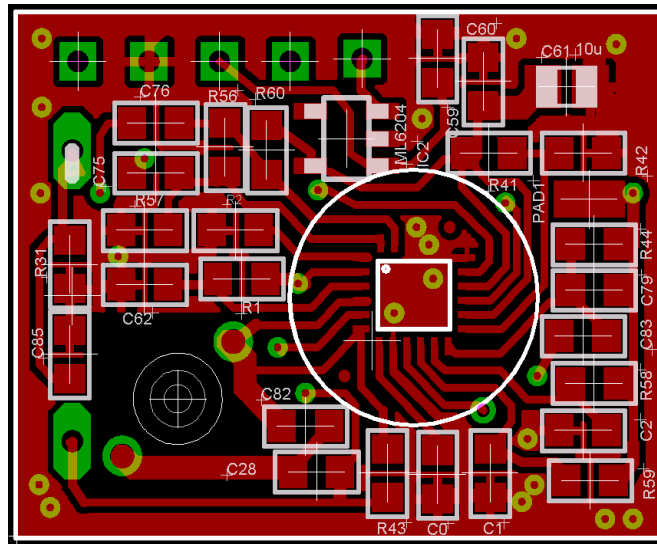

### LW103HM PCB Bottom Layer (23.3 x 18.5 x 1 mm)

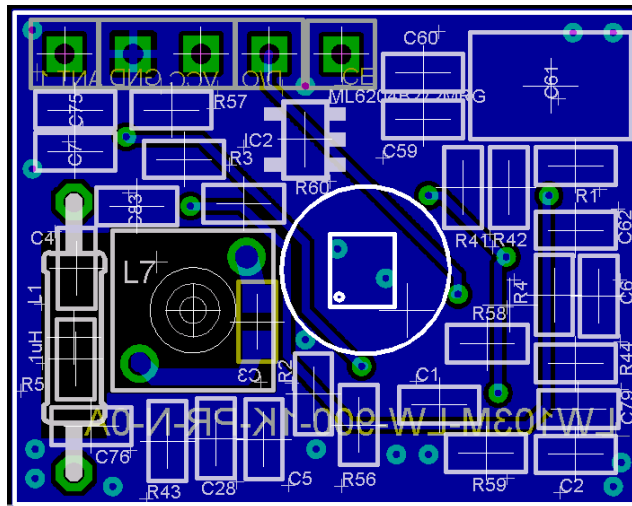

Lexiwave Technology (Hong Kong) Ltd.  
[www.lexiwave.com](http://www.lexiwave.com)  
LW103HM 850 MHz to 930 MHz ASK Receiver Module  
Preliminary Data Sheet  
Subject to change without prior notice



Rev 0.1, June, 2008

### **IMPORTANT NOTICE**

The information presented in this document does not form part of any quotation or contract. Lexiwave Technology (Hong Kong) Limited (Lexiwave) does not assume any responsibilities for use of any circuitry described and no circuit patent licenses are implied. No liability will be accepted by Lexiwave for any consequence of its use. Lexiwave reserves the right to make changes to its products or to discontinue any integrated circuit products or services without notice.

A few applications using integrated circuit products may involve potential risks of death, personal injury, or severe property or environmental damage. Lexiwave's integrated circuit, module or any other products are not designed, intended, authorized, or warranted to be suitable for use in life-support applications, devices or systems or other critical applications. Use of Lexiwave's products in such applications is understood to be at the full risk of the customer.

---

### **Lexiwave Technology (Hong Kong) Ltd.**

Unit 205, 2/F, IC Development Centre,  
No. 6 Science Park West Avenue,  
Hong Kong Science Park,  
Shatin, N.T.,  
Hong Kong.  
Tel: +852 21442592  
Fax: +852 21442595